




Attention

T784 – 2G (ASVR) Regulator

- **Special Test Procedures Required for the regulator when tested separately from the Alternator**
- **When Regulator is installed in Alternator, Normal Test procedures can be used, however grounding “F” terminal will not produce Full output of the Alternator**

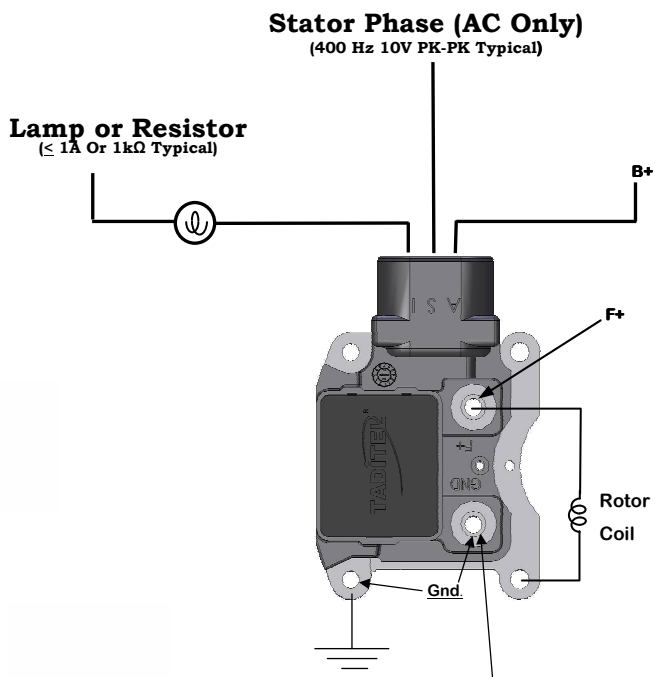

• All Terminals must be connected as shown

• Connections other than as shown may prevent the regulator from functioning properly

• Test with same Procedures as Taditel ASVR Reg. (T437)

• All field and switching measurements should be made on F+

• Grounding OE Terminal is typically used to force full output. On Taditel's T784, this Terminal is now internally connected to ground.